





REAR ELEVATION


ALL WINDOWS ARE DP 50 RATED
ALL WINDOWS ON TOP FLOOR
ARE TO BE IMPACT RESISTANT

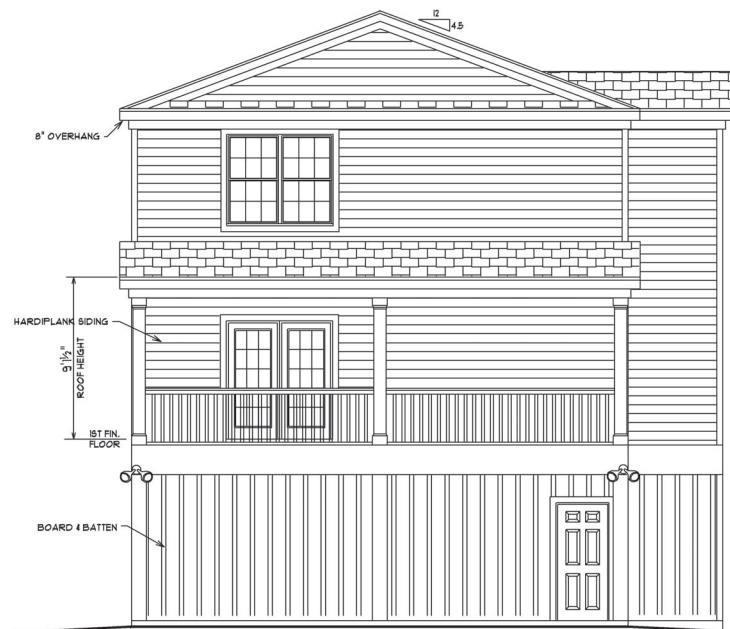


FRONT ELEVATION

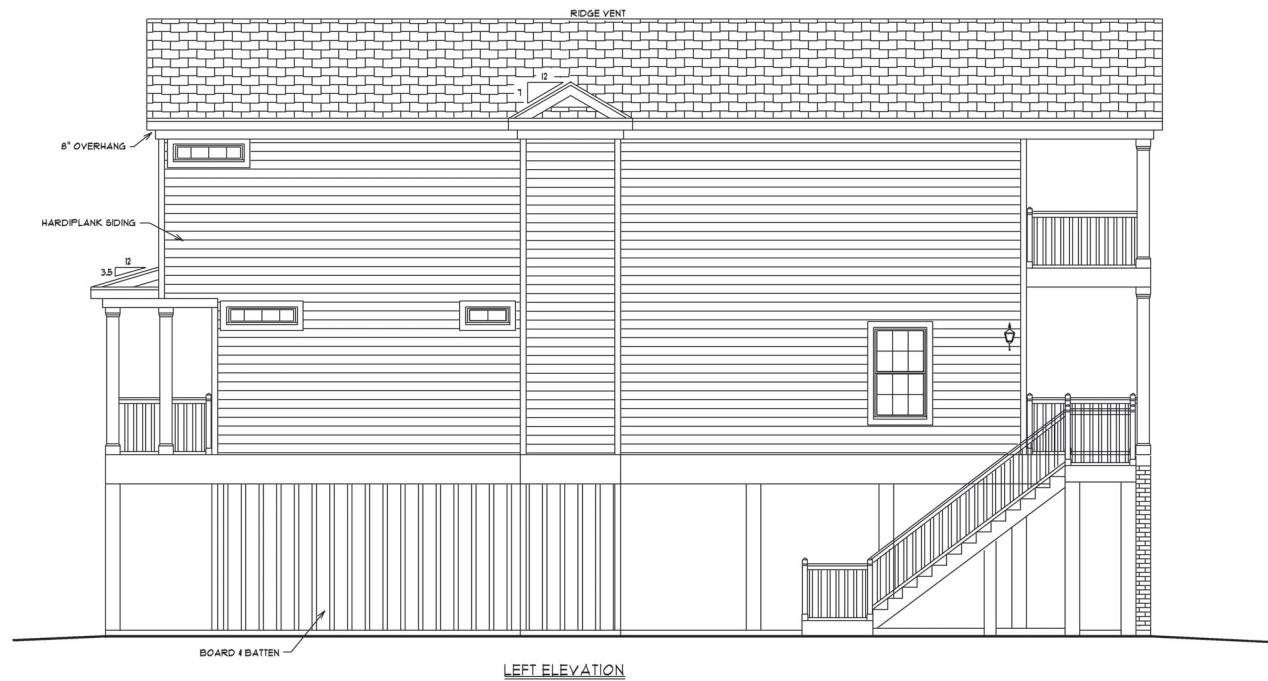


ALL WINDOWS ARE DP 50 RATED
ALL WINDOWS ON TOP FLOOR
ARE TO BE IMPACT RESISTANT

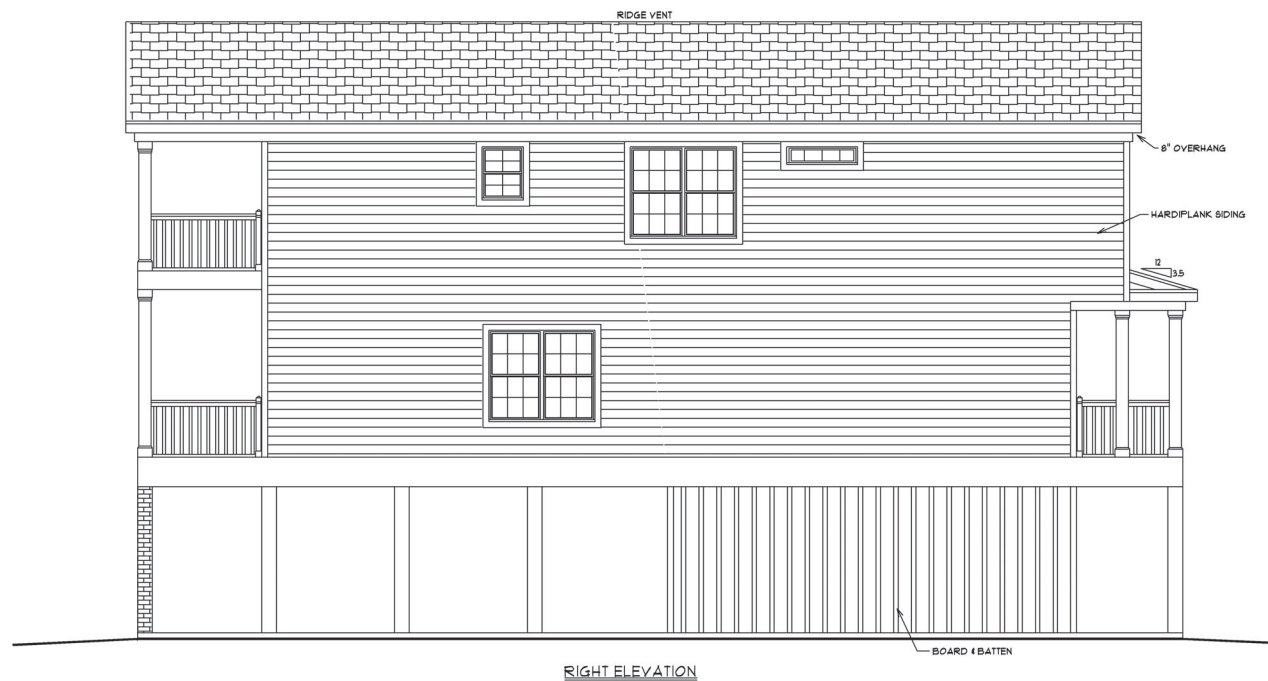

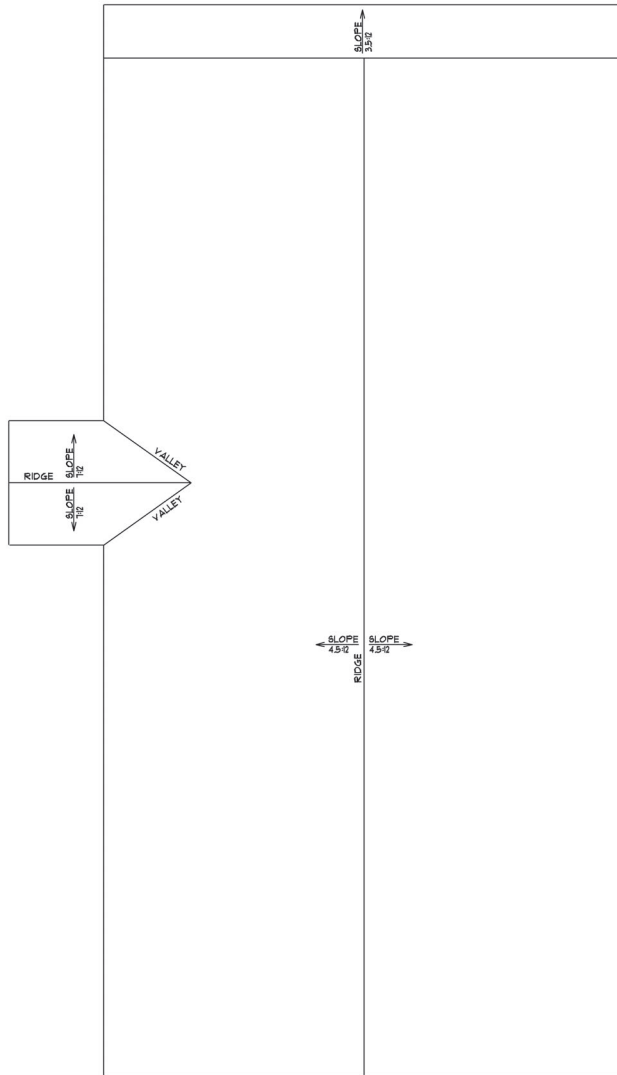


ROOF PLAN

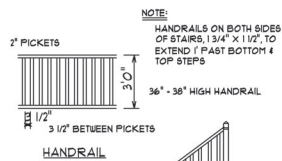


HANDRAIL

HANDRAIL GRIP SIZE-HANDRAILS SHALL HAVE EITHER A CIRCULAR CROSS SECTION WITH A DIAMETER OF 1 1/4 INCHES (31MM) TO 1 INCHES (25MM), OR A NONCIRCULAR CROSS SECTION WITH A PERIMETER DIMENSION OF AT LEAST 4 INCHES (102MM) BUT NOT MORE THAN 6 1/4 INCHES (99MM) AND A LARGEST CROSS SECTION DIMENSION NOT EXCEEDING 2 1/4 INCHES (58.6). EDGES SHALL HAVE A MINIMUM RADIUS OF 1/8 INCH (3.2MM).


GUARDRAIL OPENING LIMITATIONS-REQUIRED GUARDRAILS ON OPEN SIDES OF STAIRWAYS, RAISED FLOOR AREAS, BALCONIES AND PORCHES SHALL HAVE INTERMEDIATE RAILS OR ORNAMENTAL CLOSURES WHICH DO NOT ALLOW PASSAGE OF AN OBJECT 4 INCHES (102 MM) OR MORE IN DIAMETER.

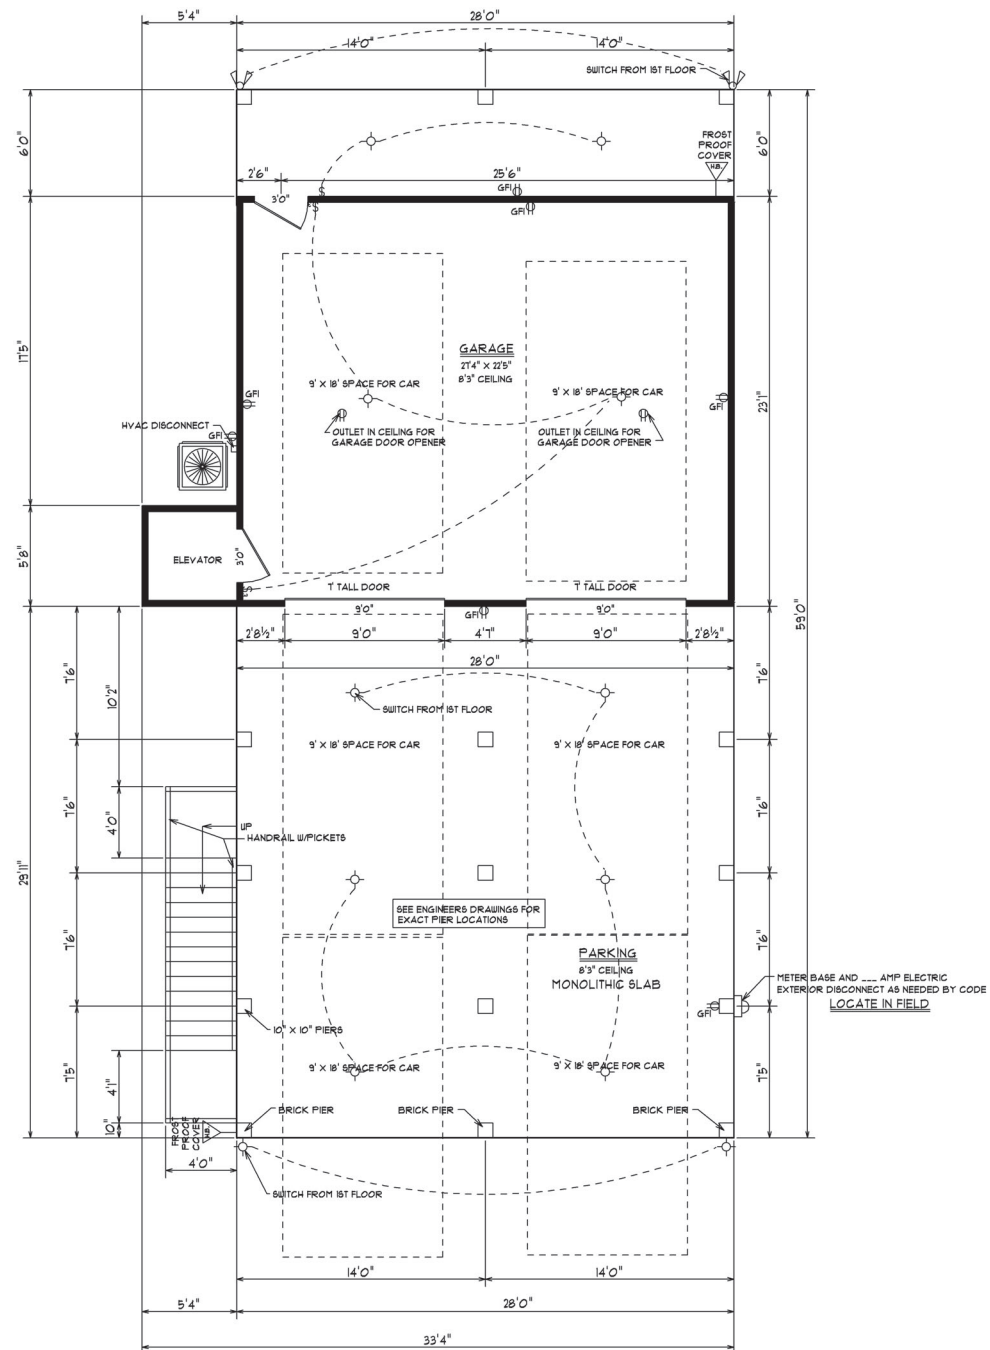

ELECTRICAL LEGEND	
SYMBOL	DESCRIPTION
⬤	LIGHT
⊕	RECESSED CAN LIGHT
Ⓢ	SWITCH
Ⓢ₃	3-WAY SWITCH
Ⓢ	220 OUTLET
Ⓢ	110 OUTLET
Ⓢ GFI	GROUND FAULT INTERRUPTER
TV	TELEVISION
▽	TELEPHONE
⊕	BATH FAN/LIGHT
⊕	BATH FAN ONLY
⊕	GARBAGE DISPOSAL
⊕	SPEAKER
⊕ DB	DOORBELL BUTTON
MD	SMOKE DETECTOR
⊕	DOUBLE FLOOD LIGHT
⊕	HOSE BIB
⊕	PREWIRED FAN/LIGHT
ARC FAULT PROTECTION IN ALL ROOMS REQUIRED BY 2011 NEC CODE	

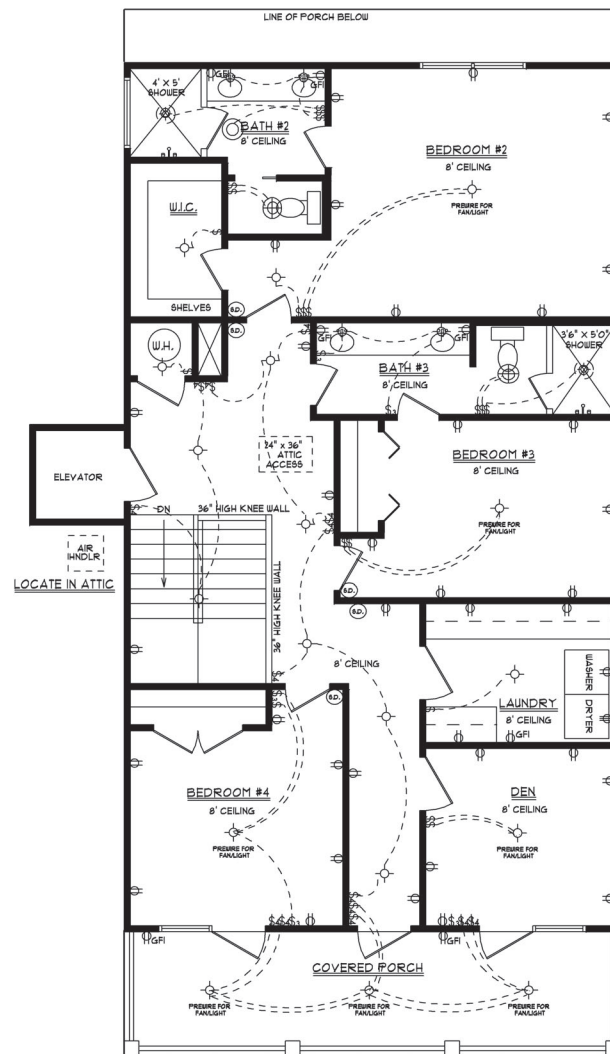

SECOND FLOOR PLAN

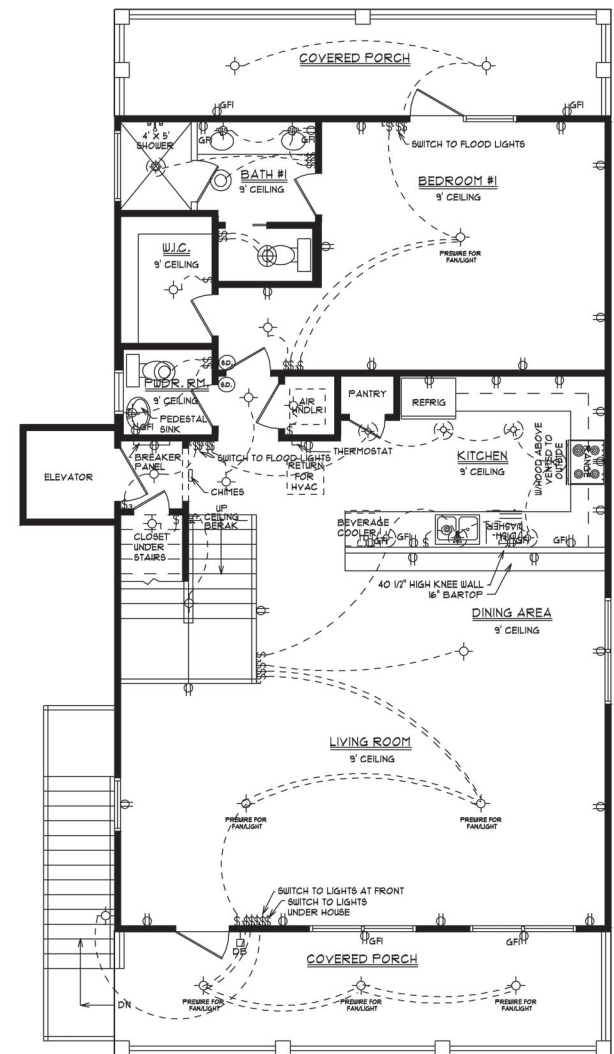

FIRST FLOOR PLAN